


## DA-911A Dispatch Amplifier

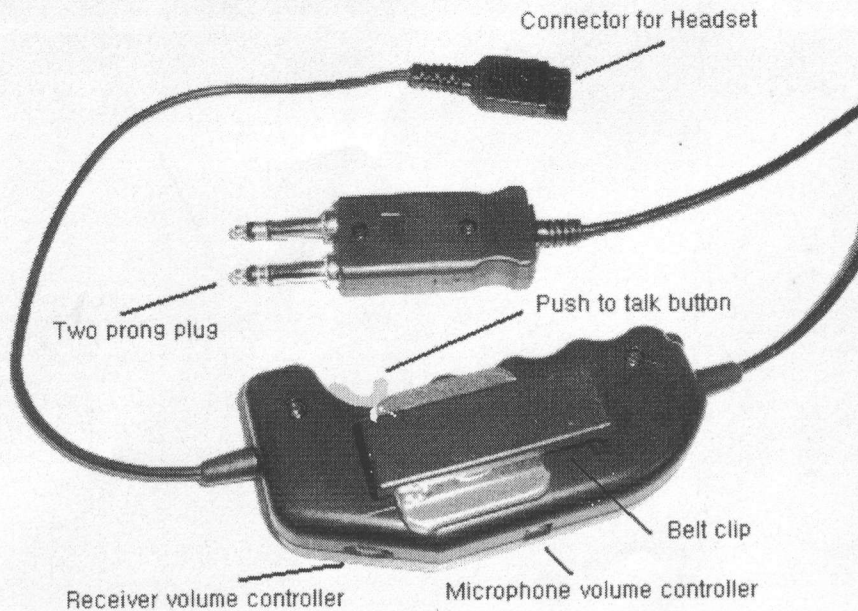

### Operation manual

The 6 wire dispatch amplifier is made for 911 call center and air-traffic control center.

∞ Push to talk button

The push-to-talk button can be depressed momentarily or locked in the "ON" position by first depressing then sliding the button to the below until it locks.

∞ Microphone volume controller

When install the amplifier, adjust the microphone volume level with Screw-driver.

∞ Receiver volume controller

Adjust receiving volume level by turning the rotary switch.

∞ Two prong plug

Plug into the appropriate jack in your station or jack-set.

∞ Belt clip

You can keep the amplifier with belt clip when you do not use the Amplifier.

∞ Connector for headset top

Any headsets assembled with the same connector can be connected.

### Product Specifications

#### Complete headset

New weight : 280 gr

Shipping weight : 360 gr

#### Operating and Storage Ranges

Operating voltage range : 2.5 V ~ 5 V

Operating current range : 0.12 mA ~ 0.95 mA

Operating temperature : 0 °C to 50 °C

Storage temperature : -40 °C to 65 °C

#### Microphone Amplifier

Frequency range : 100 Hz ~ 8 KHz (-6dB)

Distortion : Less than 5%

Total gain : 15 dB ± 2 dB

Polarity : Non-polarity

Terminal voltage : 3V dc @ 0.26 mA

#### Receiver

Frequency range : 300 Hz ~ 3.3KHz

Distortion : Less than 5%