




FREEDOM II QUICK START GUIDE



This guide will walk you through the general setup of the Freedom II wireless headset for business phone.

NOTE: FOR EHS (ELECTRONIC HOOKSWITCH) USERS, PLEASE CONNECT THE EHS ACCORDING TO THE INSTRUCTIONS AND GO TO STEP 2 TO SETUP THE WIRELESS UNIT.

REAR VIEW OF THE CHARGER BASE

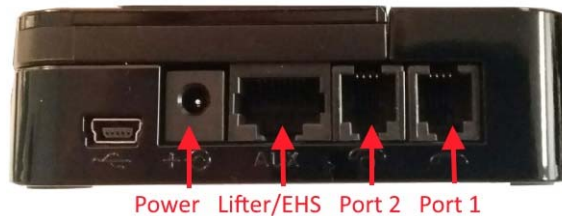

DO NOT PLUG THE POWER SUPPLY INTO THE CHARGER UNTIL INSTRUCTED IN STEP 3.

Step 1: Unplug your handset with the curly cord from your phone and plug it into Port #1 on the wireless base. Plug the modular to modular clip cord included with the wireless from the Port #2 on the wireless base to the **handset port** on your phone

Step 2: Firmly seat the Freedom headset into the base unit to prepare for charging.

Step 3: **NOW** - PLUG THE **POWER** CORD INTO THE WIRELESS BASE AND INTO A WALL OUTLET.

- a) Blue headset light on the base should blink several times then will go out.
- b) On the headset itself, the blue light will continue to flash occasionally. THIS IS NORMAL.
- c) The green battery light on the base will flash occasionally, depending on the rate that the battery is charging.

Step 4: Although this unit is shipped fully charged, we recommend charging for a minimum of 3 hours before use.

TO RE-SYNC the charger base and wireless headset, unplug the DC power and repeat step 2 and step 3 above. If you're switching more than one headset and charger, be sure to unplug the DC power from all bases and repeat step 2 and 3 above.



Comfort Telecommunications, Inc
1407 SE 47th Terrace
Cape Coral FL 33904

Email: sales@comfortel.com Phone 800-399-3224 Fax 239-945-0288

For more headset products visit us at www.smithcoronaheadsets.com * www.comfortel.com